




Aillean Hope Global Ltd.

13F, No. 2, Zhonghua 4th Rd., Lingya Dist.,
Kaohsiung City, Taiwan, R. O. C.

TEL: 886-7-5362383

FAX: 886-7-5360340

E-MAIL: ailleen1201@gmail.com

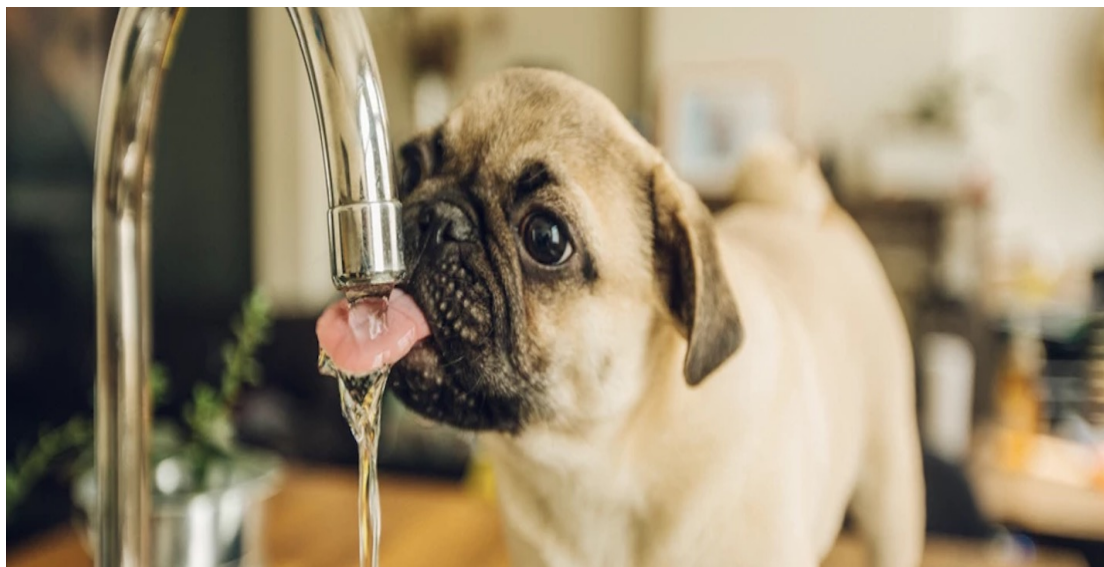

愛琳環球有限公司
Aillean Hope Global



Counter Top CASE RO SYSTEM



AILEEN HOPE



RO-1000



Counter Top CASE RO SYSTEM


RO-1000

Features & Benefits


- A slim elegant design nice for counter top.
- Combining with the quick type inline filters for easy replacement and maintenance.
- All-In-One setting ~ case with water tank.
- DP filters to be optional.
* Customized design can be R&D.
- 提供客制化新機型設計與製作 ~ 整體設計極簡俐落。
- 兼具桌上型及儲水功能於一機。
- 快速接頭濾心系列 ~ 容易安裝及方便更換。
- 拋棄式濾心組可供另一組裝選擇。



Installation Chart

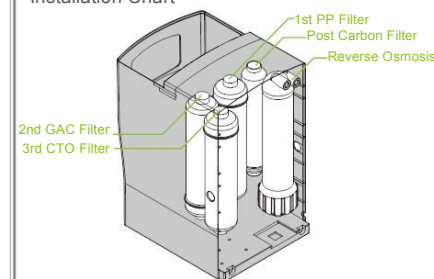

Installation Chart

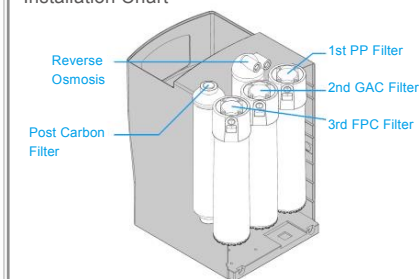

Specifications

Model No.	RO-1000
RO output	50 / 75 GPD
Voltage	110 / 220 (V)
Dimensions	D30 x W24 x H40cm
Tank	5L



Wall-hang design case RO SYSTEM



Wall-hang design case RO SYSTEM


RO-2000

Features & Benefits

- An elegant compact design.
- Wall-hang design ~ minimize space.
- All-In-One system ~ counter top and water storage.
- Easy to install.
- DP / Quick filter series ~ easy to change.
- Customized label available to change.
- 整體設計極簡俐落。
- 掛壁式設計，不佔空間。
- 兼具桌上型及儲水功能於一機。
- 快速接頭濾心系列 ~ 容易安裝。
- 拋棄式濾心方便更換。
- 可提供客制化商標替換。



Major Parts

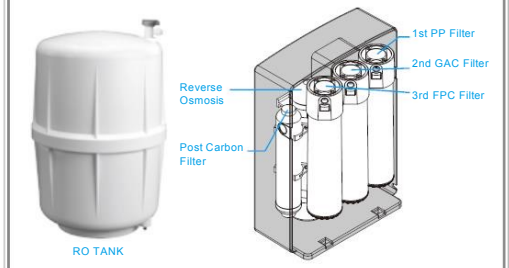

Specifications

Model No.	RO-2000
RO output	50 / 75 / 100 GPD
Voltage	110 / 220 (V)
Dimensions	D30 x W19 x H42cm
Tank Volume	3.8 Gal.

RO-3000 SERIES



Under Counter Smart Case RO System

廚下型智能RO機




Features & Benefits

- Excellent to be combined with Refined-design, Variously with traditional type RO System.
- Smart panel : Micro-computer flow control , auto-display to replace the filters.
- Anti-Rust design: Plastic structure to avoid the problem from steel frame.
- Capacity for flow: maximum flow up to 250G.
- High quality filters: To be with high quality coconut shell activated Carbon filters-for good taste and pure drinking water.
- Shut off the feed water when an leakage is detected.
- 外觀優美: 美麗的外觀設計, 不再是一成不變的RO機。
- 智能面板: 微電腦流量控制, 自動顯示更換濾心。
- 防鏽設計: 採用塑膠結構, 改善傳統鐵架生鏽問題。
- 大流量: 最大流量可達250G。
- 純淨好水: 採用天然椰殼炭, 口感純淨甘甜。
- 漏水偵測: 漏水時自動將源水關閉設計。



Major Parts

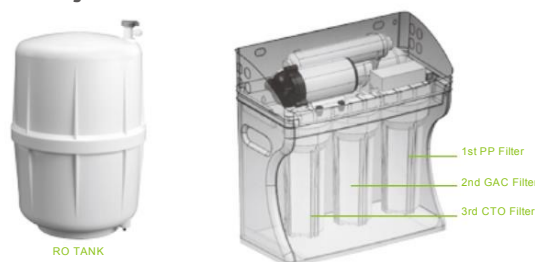

Specifications

Model No.	RO-5000
RO output	50 / 75 / 100 / 250 GPD
Voltage	110 / 220 (V)
Dimensions	D43 x W22 x H46 cm
Tank Volume	3.8 Gal.


INDUSTRIAL MEMBRANE

工業膜



Specifications	Product	Performance		Test Conditions				
		Permeate flow rate (GPD)	Typical salt rejection (%)	NaCl Conc (ppm)	Pressure [psi (bar)]	Temp [°C (°F)]	PH	Recovery (%)
	BW-4040-LP	2000	98	500	100 (6.9)	25 (77)	3 ~ 10	15
	BW-2521	300	99	1500	150 (10.3)	25 (77)	3 ~ 10	8
	BW-2540	750	99	1500	150 (10.3)	25 (77)	3 ~ 10	15
	BW-4021	1000	99	1500	150 (10.3)	25 (77)	3 ~ 10	8
	BW-4040	2600	99	1500	150 (10.3)	25 (77)	3 ~ 10	15

Dimensions (mm)




	A	B	C	D
BW-4040-LP	1016	962.6	19.1	99.7
BW-2521	533.4	473	19.1	61
BW-2540	1016	955.6	19.1	61
BW-4021	533.4	533.4	19.1	99.7
BW-4040	1016	962.6	19.1	99.7

Specifications

Product	Performance		Test Conditions				
	Permeate flow rate (GPD)	Typical salt rejection (%)	NaCl Conc (ppm)	Pressure [psi (bar)]	Temp [°C (°F)]	PH	Recovery (%)
BW-8040	11200	98	1500	150 (10.3)	25 (77)	3 ~ 10	15

Dimensions (mm)



	A	B	C
BW-8040	1016	28.5	201.9

RO MEMBRANE

RO膜




Operating Limits


Maximum operating pressure	最大工作壓力	125 psi (8.6 bar)
Maximum operating temperature	最高工作溫度	45°C (113°F)
Maximum feed flow rate	最大進水流量	2.0 gpm (7.6 lpm)
pH range, Continuous ¹	連續動作PH值	2-11
Free chlorine tolerance ²	游離氯耐受性	< 0.1 ppm

- Maximum temperature for continuous operation above pH 10 is 35°C (95°F)
- Under certain conditions, the presence of free chlorine and other oxidizing agents will cause premature membrane failure. Since oxidation damage is not covered under warranty, we recommend removing residual free chlorine by pretreatment prior to membrane exposure.
- 在pH大於10，連續操作的最高溫度為35°C(95°F)。
- 在特定條件下，游離氯和其他氧化劑的存在會導致膜過早失效。由於氧化損壞不在保修範圍內，因此建議在膜暴露前通過預處理去除殘餘游離氯。

Residential Reverse Osmosis Elements

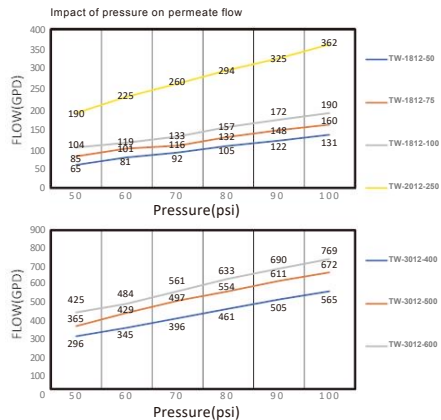

Influence of temperature and pressure on permeate flow

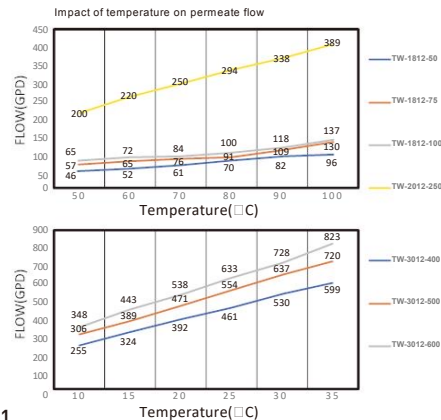

Specifications


Product	Performance		Test Conditions				
	Permeate flow rate (GPD)	Typical salt rejection (%)	NaCl Conc (ppm)	Pressure [psi (bar)]	Temp [°C (°F)]	PH	Recovery (%)
TW-1812-50	50	98	250	60 (4.1)	25 (77)	6.5 ~ 7.5	15
TW-1812-75	75	98					
TW-1812-100	100	98					
TW-2012-250	250	96		80 (5.5)			

Permeate flow and salt rejection based on the following test conditions:

- 250 ppm softened tap water, 25°C (77°F), 15% recovery and the specified applied pressure.
- Minimum salt rejection is 96.0%.
- Permeate flows for individual elements may vary ±15%.

基於以下測試條件的滲透流量和脫鹽率：

- 250ppm軟化的自來水 · 25°C (77°F) · 15%的回收率和規定的施加壓力。
- 最低脫鹽率為96%。
- 滲透流量可能變化±15%。

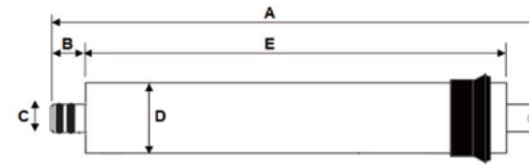

Dimensions (mm)

	A	B	C	D	E
TW-1812-50	298	27	16.85	44	245
TW-1812-75	298	19.8	16.85	44	256
TW-1812-100	298	19.8	16.85	46.5	256
TW-2012-250	298	19.8	16.85	48	256

Specifications


Product	Performance		Test Conditions				
	Permeate flow rate (GPD)	Typical salt rejection (%)	NaCl Conc (ppm)	Pressure [psi (bar)]	Temp [°C (°F)]	PH	Recovery (%)
TW-3012-400	400	96	250	80 (5.5)	25 (77)	6.5 ~ 7.5	40
TW-3012-500	500	96					
TW-3012-600	600	96					

Permeate flow and salt rejection based on the following test conditions:

- 250 ppm NaCl, 25°C (77°F), 40% recovery and the specified applied pressure.
- Minimum salt rejection is 95%.
- Permeate flows for individual elements may vary ±15%.

基於以下測試條件的滲透流量和脫鹽率：

- 250ppm軟化的自來水 · 25°C (77°F) · 40%的回收率和規定的施加壓力。
- 最低脫鹽率為95%。
- 滲透流量可能變化±15%。

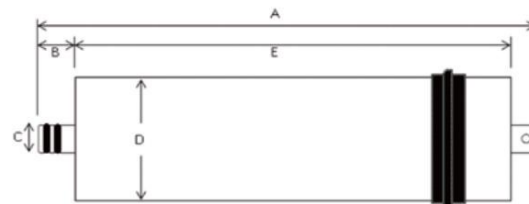

Dimensions (mm)

	A	B	C	D	E
TW-3012-400	298	19.8	16.85	73.5	260
TW-3012-500	298	19.8	16.85	73.5	260
TW-3012-600	298	19.8	16.85	73.5	260

RO TANK

無臭、無鏽-完全環保
RO 壓力桶



Z-TK022 / Z-TK032

Features & Benefits

- Tank shell made from durable polypropylene to ensure rustless and smooth surface.
- Materials are of FDA grade for drinking water.
- All plastic materials, no metal part contacts with water to avoid metal leaching.
- Diaphragm made from FDA grade material to avoid bad odors from regular rubber diaphragm.
- NSF-58 certification.
- Air pressure in tank can be re-charged by manual air pump.
- Plastic shell ensures tank against rust by the moisture on or under kitchen sink.
- 採用環保耐用PP材質100%可回收，無碰撞凹陷及環境污染等問題。
- 創新食品級熱可塑性塑膠隔膜，改善傳統橡膠膜產生的氣味。
- 全材質採用符合美國FDA食品級標準塑膠製作，保證無金屬污染水的問題，且不因使用環境潮濕造成生鏽影響環境美觀。
- NSF-58認證。
- 使用一般家用打氣筒即可快速完成充氣動作。

Patent No. / 專利號碼 : 10124874 ; 101125613

Schematic diagram



Specifications

Model No.	Z-TK022	Z-TK032
Tank volume	2.2 gal	3.8 gal
Height	13.30" / 338mm	15.74" / 400mm
Diameter	9.53" / 242mm	10.23" / 260mm
Connector	1/4" NPT	1/4" NPT
Max Temp.	45°C / 110°F	45°C / 110°F
Net Weight	5.0lbs / 2.3kg	7.0lbs / 3.2kg
Color	White	White

LLDPE TUBE

LLDPE管



LLDPE TUBE SERIES

Features & Benefits:

- Linear low density polyethylene.
- Strong, Flexible, and Robust.
- FDA compliant materials.
- NSF-61 certification.
- Length: various length to be applied.
- Suggest working pressure: under 125PSI for 1/4", 3/8" tube O.D. under 90PSI for 1/2" tube O.D.
- Working temperature: 4°C ~ 42°C.
- Nylon material can be optional and not NSF listed.
- LLDPE原料製作 ~ 絕佳的強度及抗壓度。
- FDA等級原料以及NSF-61認證。
- 可提供客制化的長度需求。
- 建議工作壓：under 125PSI for 1/4", 3/8" tube O.D. under 90PSI for 1/2" tube O.D.
- 建議工作溫度：4°C ~ 42°C



Specifications

Pattern No.	Tube O.D.	Color
T-0402	1/4"	W: White
T-0504	5/16"	Y: Yellow
T-0604	3/8"	B: Black
T-0804	1/2"	L: Blue
T-1008	5/8"	N: Natural
		R: Red
		O: Orange
*T-0402-W-R whit tube with plastic reel packed		
*TN-0508 NYLON		

Plastic Tube Cutter 水管剪

Code: Z-TC0001



POLYPROPYLENE SEDIMENT CARTRIDGES


水過濾專用PP濾心



FPP-LL-WX-ZZZ Standard series

Features & Benefits

- Three-layers structure cartridge, high contaminant holding capacity, long filter service life.
- 100%PP for compatibility with a wide range of process fluids.
- Micro-Denier melt-blown filtration fiber, high removal ratings.
- Formed by thermal bond without use of any binders and adhesives.
- Certified by NSF42 and FDA CFR Title 21.
- 生產技術 ~ 使用熱熔噴技術，其PP濾心絕無膠合成型。
- 三層式密度結構 ~ 可提高雜質攔阻及過濾的效果，以及可延長其濾心使用壽命。
- 100%純PP材料 ~ PP系列材料皆符合美國FDA標準規範。
- PP系列通過NSF-42認證規範。

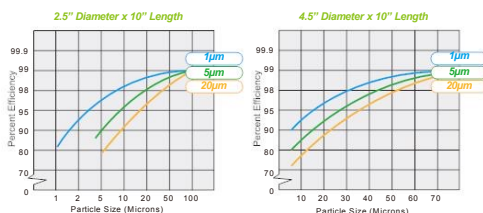

Schematic diagram



Specifications

Model No.	FPP-LL-WX-ZZZ
Micron Ratings	1, 3, 5, 10, 25, 50, 75, 100 Micron
Material of Construction	100% melt-blown micron-denier PP fiber
Length	9.87", 10", 20", 30", 40" (251mm, 254mm, 508mm, 762mm, 1016mm)
Inner Diameter	28mm
Outer Diameter	63mm, 110mm

GROOVES AND SMALL GROOVES PP FILTER

車溝 / 細紋PP濾心



FGC-LL-WX-ZZZ SERIES 車溝系列

Features & Benefits


- Grooves on outside surface.
- Three-layers structure cartridge, high contaminant holding capacity, long filter service life.
- High void volume, resulting in low differential pressure and excellent dirt holding capacity.
- No resins, binders or anti static agents to ensure minimal extractables.
- Formed by thermal bond without use of any binders and adhesives.
- Certified by NSF-42.
- 表面溝槽可增加過濾面積。
- 降低水壓的壓降。
- 無樹脂粘合劑的熱熔噴技術。
- 濾心通過NSF-42認證。



FBC-LL-WX-ZZZ SERIES 細紋系列

Features & Benefits

- Small grooves on outside surface.
- Three-layers structure cartridge, high contaminant holding capacity, long filter service life.
- 100%PP for compatibility with a wide range of process fluids.
- Micro-Denier melt-blown filtration fiber, high removal ratings.
- Formed by thermal bond without use of any binders and adhesives.
- Certified by NSF-42.
- 針對水質澄清度較佳地區所設計。
- 表面經由細紋壓整二次加工，大幅提升對於懸浮物含量少、顆粒小的水質過濾效果。
- 濾心通過NSF-42認證。

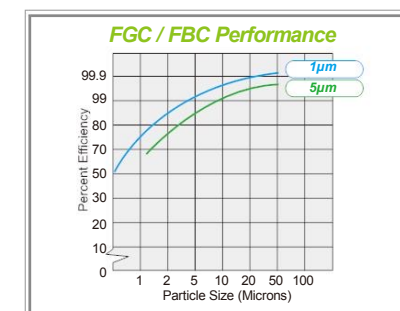

Specifications

Model No.	FGC-LL-WX-ZZZ	FBC-LL-WX-ZZZ
Micron Ratings	1µm, 5 µm	1µm, 5 µm
Material of Construction	100% melt-blown micron-denier PP fiber	100% melt-blown micron-denier PP fiber
Length	9.87", 10" (251mm, 254mm)	9.87", 10", 20" (251mm, 254mm, 508mm)

PP-GAC DUAL FUNCTION FILTER CARTRIDGES

PP活性碳複合濾心



FPC-LL-WX-ZZZ SERIES

PP Compressed with GAC Dual-Function Filter

熱壓纏繞式PP活性碳複合濾心
經濟效益高、效果可比擬活性碳纖維


Features & Benefits

- Combined with standard PP sediment or inhibit bacteria growth PP and GAC function together.
- Remove dust, odors at same time.
- High void volume, low pressure drop and excellent dirt holding capacity.
- Formed by wrapping PP-GAC without use of any binders and adhesives.
- High chlorine reduction.
- Coconut shell activated carbon.
- FPC1, FPC2 NSF-42 certified.
- 結合一般PP及長效抗菌PP與活性碳過濾效果。
- 可同時去除異味及雜質。
- 過濾面積大、效果佳、黑水少。
- FPC1, FPC2 - NSF42 認證。

Patent No. / 專利號碼: M 452007

Specifications

Model No.	FPC-LL-WX-ZZZ		
Filter Media	Polypropylene, Granular Activated Carbon	Core Material	Polypropylene
Filter Length	10", 20"	Inside Diameter	18, 28mm
Micron Ratings	5µm	Outside Diameter	63, 67, 72, 114mm

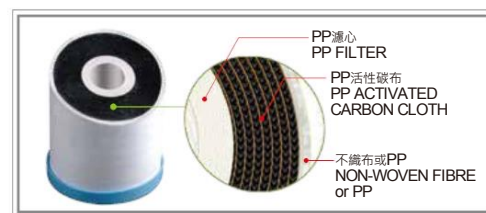

INHIBIT BACTERIA GROWTH PP FILTER

長效抗菌 濾心PP



FIB-LL-WX-ZZZ SERIES

The macromolecular technique of nano-zinc is suitably designed to the safety of ingestion while taking environmental impact and cost into consideration.


This application has won great recognition internationally in technical field.

抗菌纖維濾心採用高科技奈米技術！


將抗菌銀粒子均勻分散及植入PP濾心纖維內部，有效達到抗菌效果。

Benefit to use FIB filters:

- To avoid for the increasing amount of bacteria in drinking water.
- To avoid cross contamination of different parts in the system.
- To avoid drinking water contaminated due to the leakage of the system.
- To avoid deteriorated filtration effect for the enclosure of the biofilms of the system.
- 材料新沿革 - Clean Pure濾心採用奈米銀分子技術，針對人體安全以及環境衝擊所導入的創新的抗菌材料。
- 可避免飲用水產生異味，影響口感。
- 可避免飲用水中細菌數的增加。
- 可避免細菌造成的過濾效能降低。
- 可避免過濾系統的交流汙染。



The products tested by SGS proved antibacterial performance of 99.99%

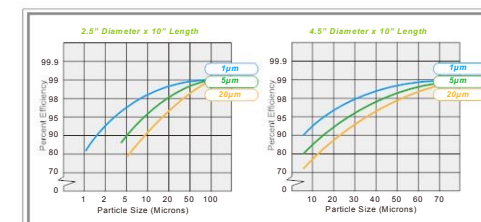

Specifications

Model No.	FIB-LL-WX-ZZZ		
Micron Ratings	1, 5, 10, 25, 50 Micron		
Material of Construction	100% melt-blown micron-denier PP fiber		
Length	9.87", 10", 20", 30", 40" (251mm, 254mm, 508mm, 762mm, 1016mm)		

POLYPROPYLENE SEDIMENT CARTRIDGES

- CUSTOMIZED SERIES 客制化PP濾心



CUSTOMIZED SERIES


Features & Benefits

- 100%PP for compatibility with a wide range of process fluids.
- Micro-Denier melt-blown filtration fiber, high removal ratings.
- Formed by thermal bond without use of any binders and adhesives.
- Various O.D. and I.D. offering different applications.
- Dual-function filter construction can be applied with different media within 2 different sizes PP filters.
- Over-molded caps for easy centering filter.
- 可提供客制化濾心的需求 ~ 多種尺寸的內外徑規格。
- 一體成型的上下端蓋可防止墊片脫落以及幫助濾心導正，並防止PP濾心by-pass。



Specifications

Model No.	CUSTOMIZED SERIES
Micron Ratings	1, 5, 10, 20, 50, 75, 100µm
Inner Diameter	15, 20, 28, 30, 32, 38, 52, 65mm
Outer Diameter	35 ~ 130 mm
Length	0.8' ~ 50' (20mm ~ 1270mm)



2-density Over-molded cap

Available in:
63mm O.D. filter use
69mm O.D. filter use
72mm O.D. filter use

STRING WOUND FILTER CARTRIDGES

線繞濾心



FWC-LL-WX-ZZZ SERIES

Applications:

Plating Solutions, Pre RO, Chemicals, Petrochemical Process, Food & Beverage, Electronics

本產品可應用於：

電鍍溶液、RO、石化加工、食品、飲料、電子業等前過濾用濾心

Features & Benefits:

- Continuous strand winding process provides consistent performances of high dirt holding capacity, long service and high flow rate.
- Numerous filter media provide excellent chemical compatibility for different applications.
- No odor, no foaming and no media migration.
- Computer programming capability optimizes the filter cartridge geometrically and maximizes the use of surface area.
- 連續式纏繞，提高納垢量，使用壽命長及流量高。
- 可多種材質製作，優異的耐化學性，應用於不同用途。
- 無臭、無氣泡、無雜質釋出。
- 電腦程式幾何繞線，使過濾面積達到最大。



Specifications

Model No.	FWC-LL-WX-ZZZ		
Filter Media	Polypropylene, Bleached Cotton	Core Material	Polypropylene
Filter Length	10", 20", 30", 40"	Inside Diameter	1.1" (28mm)
Micron Ratings	1, 5, 10, 25, 50, 100µm	Outside Diameter	2.5" (63mm), 4.5" (114mm)

GRANULAR ACTIVATED CARBON PLUS KDF FILTER

活性碳+KDF複合濾心



BFCKDF-10 /20 SERIES

Durable Multifunction filter for water treatment

Coconut Shell Activated Carbon- Designed to remove chlorine, odor and bad taste.

KDF 55 Media - Removes chlorine, heavy metals and kills bacteria.

Features & Benefits :

- Coconut Shell Activated Carbon with NSF-61 Certification.
- KDF 55 Medium with NSF-42 Certification.
- Excellent Flow Rate.
- High Capacity Dual function filter cartridge with excellent chlorine, taste, odor, bacteria and heavy metal reduction.

WARNING: Do not use with water that is micro-biologically unsafe or of unknown quality, without adequate disinfection before or after the system.

NOTE: This cartridge may contain carbon fines (very fine black powder). After installation and before using the water, follow the instructions for flushing the cartridge to remove fines.

NOTE: It is recommended that you flush for 20 seconds prior to using the water for drinking or cooking purposes.

NOTE: Chlorine reduction capacity is estimated with 2.0ppm free available chlorine (FAC) at continuous flow rate at greater than 75% reduction.



Specifications

Model No.	BFCKDF-10	BFCKDF-20
Filter O. D.	4.5"	4.5"
Filter Length	10"	20"
Max Temperature	40~125°F (4.4~51.7°C)	
Chlorine Reduction @ Flow Rate	Above 47,000L @ 7.6 Lpm (Based on manufacturers internal testing)	
Media	Coconut Shell Activated Carbon , KDF 55 Medium	

WATER FILTER CARTRIDGES

活性碳水過濾專用濾心

Model No. GAC Filter - Welding Cap Type



Model No. GAC Filter - Threading Cap Type

- Top cap can be opened to refill the media.
- All filters with coconut shell activated carbon.
 - Design to remove chlorine, odor and bad taste.
 - NSF Carbon to be optional.
- 旋溶式和鎖牙式濾心可供選擇。
- 可採用NSF椰殼活性碳。



Specifications

Model No.	Welding Type UDF	Threading Cap Type UDF
Filter O. D.	2.5", 4.5"	2.5", 4.5"
Filter Length	5", 10", 20"	10", 20"
Max Temperature	40~125°F (4.4~51.7°C)	
Media	Coconut Shell Activated Carbon	

WATER FILTER CARTRIDGES

水過濾專用濾心



Model No. CTO Filter

- Coconut carbon.
- NSF 42 standard certificate.



WATER FILTER CARTRIDGES

水過濾專用濾心



Model No. K-33 Type, T-33 Type



WATER FILTER CARTRIDGES

水過濾專用濾心

Model No. **K-33 Type Resin Filters, T-Bio Type Filters, T-33 Mineral Filters**



Model No. **Resin Filter**



RO MEMBRANE HOUSING

RO膜殼系列



LEAK DETECTOR

斷水器

Water Leak detector with Shut OFF switch for Reverse Osmosis Water Purification Systems



LD04 / LD06

Features & Benefits

- Avoid any worries about Reverse Osmosis or other purification systems.
- Shuts off the incoming water when a leaking is detected.
- Sponge pad will expand when it contact and absorb fluid, the expand will trigger the lever and activate shut off valve.
- No power or battery needed.
- Inlet and Outlet-Quick Connect for 1/4" standard RO tubing.
- Easily attaches to any smooth surface with screw or adhesive pad.

- 當系統有任何微小漏水，都容易偵測檢測到漏水，漏水時開關會打開並關閉進水端進水。

發明第I662214號

SIZE: 1/4" Tube O.D. use
3/8" Tube O.D. use



PRESSURE LIMITING VALVE

穩壓閥



Note

- Pressure ratio 減壓比例: 10:1 (for every 1.5PSI increase in inlet pressure above 150PSI, the outlet pressure will increase by 0.145PSI).

- Max inlet pressure 最大進水壓力: 230PSI
- Working temperature 建議使用溫度: 4°C ~ 40°C

Z-LCV-FPV0104 Z-LCV-FPV0308 WITH DUAL CHECK

Features & Benefits

- 100% hand tested.
- Protects water filter cartridge by limiting water pressure to filter.
- Prevents backflow.
- Resists water hammer.
- 內置雙逆止閥設計 ~ 不迴流。



Specifications

Pattern No.	Tube O.D.	Outlet Pressure - PSI
Z-LCV-FPV0104	1/4"	40, 50, 70, 80
Z-LCV-FPV0308	3/8"	40, 50, 70, 80

Z-LV-FPV0104 Z-LV-FPV0308

Features & Benefits

- High quality pressure limiting valves being applied for high pressure system to protect downstream components - Water filters, Drink dispensers, RO system.
- Protect water filtration devices by limiting water pressure and reducing water hammer.
- Different pressure ratio setting for options to suit different application.
- Quick fitting connector for easy to install onto your application.



Specifications

Pattern No.	Tube O.D.	Outlet Pressure - PSI
Z-LV-FPV0104	1/4"	40, 50, 60, 70, 80, 125
Z-LV-FPV0308	3/8"	40, 50, 60, 70, 80, 125

- 本產品設計主要保護濾水器、製水機、咖啡機器，以及RO逆滲透機器等抵擋水錘效應 ~ 避免造成濾殼及其他設備的損壞。
- 提供多種不同出水壓力設定的選擇 ~ 適用各區域及國家。
- 快速接頭設計 ~ 安裝快速簡便。
- 體機小功能大 ~ 不佔組裝空間運用。

Z-LV-FPV0304

Features & Benefits

- 3/4" threaded ports: Designed for BB filter systems use.
- Related connectors and KIT packing box to be optional.
- 3/4" 螺牙式設計：可供大胖過濾系統使用。
- 相關連接管申接頭及包裝盒，可供選擇使用。



Specifications

Pattern No.	Thread Size	Outlet Pressure - PSI
Z-LV-FPV0304	3/4"	40, 70

QUICK CONNECT FITTINGS

快速接頭系列

NSF®



Male Connectors

Pattern No.	Tube O.D.	Pipe Thd.
Z-Q-1042	1/4"	1/8"
Z-Q-1044	1/4"	1/4"
Z-Q-1046	1/4"	3/8"
Z-Q-1064	3/8"	1/4"
Z-Q-1066	3/8"	3/8"
Z-Q-1068	3/8"	1/2"
Z-Q-1086	1/2"	3/8"
Z-Q-1088	1/2"	1/2"



Union Connector

Pattern No.	Tube O.D.
Z-Q-1544	1/4"-1/4"
Z-Q-1564	3/8"-1/4"
Z-Q-1566	3/8"-3/8"



Bulkhead Union

Pattern No.	Tube O.D.
Z-Q-2044	1/4"-1/4"
Z-Q-2046	1/4"-3/8"
Z-Q-2066	3/8"-3/8"



Female Adaptor

Pattern No.	Tube O.D.	Pipe Thd.
Z-Q-2544	1/4"	1/4"NPTF
Z-Q-2548	1/4"	1/2"NPTF
Z-Q-2548	1/4"	1/2"PF Female
Z-Q-254-716	1/4"	7/16"NPTF
Z-Q-256-716	3/8"	7/16"NPTF
Z-Q-256-716-12	3/8"	7/16"NPTF
Z-Q-2566	3/8"	3/8"NPTF
Z-Q-2568	3/8"	1/2"NPTF



Male Elbows

Pattern No.	Tube O.D.	Pipe Thd.
Z-Q-4042	1/4"	1/8"
Z-Q-4044	1/4"	1/4"
Z-Q-4046	1/4"	3/8"
Z-Q-4064	3/8"	1/4"
Z-Q-4066	3/8"	3/8"
Z-Q-4068	3/8"	1/2"
Z-Q-4086	1/2"	3/8"
Z-Q-4088	1/2"	1/2"



Male Elbows w/Check valve

Pattern No.	Tube O.D.	Pipe Thd.
Z-Q-4042B	1/4"	1/8"



Female Elbow

Pattern No.	Tube O.D.	Pipe Thd.
Z-Q-4542	1/4"	1/8" NPTF



Union & Reducing Elbows

Pattern No.	Tube O.D.
Z-Q-5044	1/4"-1/4"
Z-Q-5064	3/8"-1/4"
Z-Q-5066	3/8"-3/8"



Two Way Divider

Pattern No.	Tube O.D.
Z-Q-TWD0404	1/4"-1/4"-1/4"
Z-Q-TWD0606	3/8"-3/8"-3/8"



Stem Run Tees

Pattern No.	Tube O.D.	Stem O.D.
Z-Q-SRT7544	1/4"-1/4"	1/4"
Z-Q-SRT7566	3/8"-3/8"	3/8"



Stem Branch Tees

Pattern No.	Tube O.D.	Stem O.D.
Z-Q-SBT6044	1/4"-1/4"	1/4"
Z-Q-SBT6066	3/8"-3/8"	3/8"



Stem Elbow

Pattern No.	Tube O.D.	Stem O.D.
Z-Q-SE4044	1/4"	1/4"
Z-Q-SE4046	1/4"	3/8"
Z-Q-SE4064	3/8"	1/4"
Z-Q-SE4066	3/8"	3/8"



Feed Water Connector

Pattern No.	Tube O.D.	Pipe Thd.
Z-Q-KFA0408	1/4"	1/2"NPT
Z-Q-KFA0408-5	1/4"	5 Thd. Pitch
Z-Q-KFA0608	3/8"	1/2"NPT
Z-Q-KFA0608-5	3/8"	5 Thd. Pitch



Stem Reducer

Pattern No.	Tube O.D.	Stem O.D.
Z-Q-SR1046	1/4"	3/8"



Stem Reducer w/Check Valve

Pattern No.	Tube O.D.	Stem O.D.
Z-Q-SR1064B	3/8"	1/4"



Stem Adaptor

Pattern No.	Pipe Thd.	Stem O.D.
Z-SA0404	1/4"	1/4"
Z-SA0406	1/4"	3/8"
Z-SA0604	3/8"	1/4"
Z-SA0606	3/8"	3/8"



Stem Adaptor w/Check Valve

Pattern No.	Pipe Thd.	Stem O.D.
Z-SA0604B	3/8"	1/4"

RO VALVE

RO閥系列



Low pressure switch-NPTF

Pattern No.
Z-LPS-J0404



Low pressure switch-Quick

Pattern No.
Z-LPS-Q0404



High pressure switch-NPTF

Pattern No.
Z-HPS-F0404



High pressure switch-Jaco

Pattern No.
Z-HPS-J0404



High pressure switch-Quick

Pattern No.
Z-HPS-Q0404



Shut off valve-Jaco

Pattern No.
Z-SV-J0404W



Shut off valve-Quick

Pattern No.
Z-SV-Q0404W
Z-SV-Q0606W



Flush Valve

Pattern No.	
FR-FV-001	200CC
FR-FV-001	300CC
FR-FV-001	420CC
FR-FV-001	550CC



Male Branch Tees

Pattern No.	Tube O.D.	Pipe Thd.
Z-Q-6044	1/4"-1/4"	1/4"
Z-Q-6064	3/8"-1/4"	3/8"
Z-Q-6066	3/8"-3/8"	3/8"



Union Tees

Pattern No.	Tube O.D.
Z-Q-7044	1/4"-1/4"-1/4"
Z-Q-7046	1/4"-3/8"-1/4"
Z-Q-7064	3/8"-1/4"-3/8"
Z-Q-7066	3/8"-3/8"-3/8"



Male Run Tee

Pattern No.	Tube O.D.	Pipe Thd.
Z-Q-7544	1/4"-1/4"	1/4"
Z-Q-7564	3/8"-3/8"	1/4"



Male Reducing Tees

Pattern No.	Tube O.D.	Pipe Thd.
Z-Q-7644	3/8"-1/4"	1/4"

RO VALVE

RO閥系列



Flow Restrictor

Pattern No.	Tube O.D.
Z-FR-J150	1/4"
Z-FR-J220	1/4"
Z-FR-J300	1/4"
Z-FR-J420	1/4"
Z-FR-J550	1/4"
Z-FR-J800	1/4"
Z-FR-J1200	1/4"
Z-FR-J1350	1/4"
Z-FR-J1600	1/4"
Z-FR-J2000	1/4"

Flow Restrictor

Pattern No.	Thd.
Z-FR-F150	1/4"
Z-FR-F220	1/4"
Z-FR-F300	1/4"
Z-FR-F420	1/4"
Z-FR-F550	1/4"
Z-FR-F800	1/4"
Z-FR-F1200	1/4"
Z-FR-F1350	1/4"
Z-FR-F1600	1/4"
Z-FR-F2000	1/4"

Flow Restrictor

Pattern No.	Tube O.D.
Z-FR-Q150	1/4"
Z-FR-Q220	1/4"
Z-FR-Q300	1/4"
Z-FR-Q420	1/4"
Z-FR-Q550	1/4"
Z-FR-Q800	1/4"
Z-FR-Q1200	1/4"
Z-FR-Q1350	1/4"
Z-FR-Q1600	1/4"
Z-FR-Q2000	1/4"



Flow Restrictor Mini

Pattern No.	Tube O.D.	Pattern No.	Tube O.D.
Z-FR2-Q150	1/4"	Z-FR2-Q800	1/4"
Z-FR2-Q220	1/4"	Z-FR2-Q1200	1/4"
Z-FR2-Q300	1/4"	Z-FR2-Q1350	1/4"
Z-FR2-Q420	1/4"	Z-FR2-Q1600	1/4"
Z-FR2-Q550	1/4"	Z-FR2-Q2000	1/4"



Flow Restrictor

Pattern No.	Tube O.D.
Z-FR2-J150	1/4"

Pressure Release Valve


Pattern No.	Tube O.D.
PRV04	1/4"

Union Connector w/Check Valve

Pattern No.	Tube O.D.
Z-CV-Q1544	1/4"
Z-CV-Q1566	3/8"



Tube O.D.	Pipe Thd.	Tube O.D.	Pipe Thd.	Tube O.D.	Pipe Thd.
1/4"	3/4" PET	1/4"	3/4" BSP	1/4"	3/4" NPT

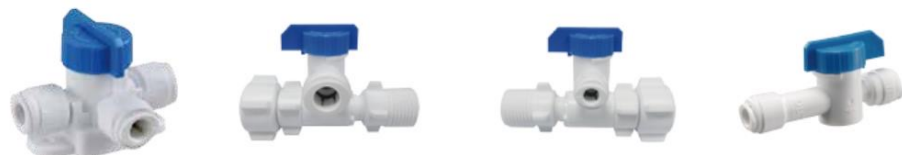

Ball Valve

Pattern No.	Tube O.D.
Z-BV-Q7044	1/4"

(Fixing Base)

Ball Valve

Pattern No.	Tube O.D.	Ports
Z-BV-QKFA0608	3/8"	1/2"

Ball Valve

Pattern No.	Tube O.D.	Ports
Z-BV-QKFA0408	1/4"	1/2"

Ball Valve w/Check valve

Pattern No.	Tube O.D.
Z-BV-Q1544-CV	1/4"



Ball Valve

Pattern No.	Tube O.D.
Z-BV-Q1544	1/4"-1/4"
Z-BV-Q1564	3/8"-1/4"
Z-BV-Q1566	3/8"-3/8"

Ball Valve

Pattern No.	Tube O.D.	Pipe Thd.
Z-BV-Q2544	1/4"	1/4"NPTF
Z-BV-Q2564	3/8"	1/4"NPTF

Ball Valve

Pattern No.	Tube O.D.	Pipe Thd.
Z-BV-J2544	1/4"	1/4"NPTF

Ball Valve

Pattern No.	Tube O.D.	Pipe Thd.
Z-BV-Q1044	1/4"	1/4"NPTF
Z-BV-Q1066	3/8"	3/8"NPTF

COMPRESSION TUBE FITTINGS

接頭系列



Male Connectors

Pattern No.	Tube O.D.	Pipe Thd.
Z-1042	1/4"	1/8"
Z-1044	1/4"	1/4"
Z-1046	1/4"	3/8"
Z-1048	1/4"	1/2"
Z-1064	3/8"	1/4"
Z-1066	3/8"	3/8"
Z-1068	3/8"	1/2"
Z-1088	1/2"	1/2"

Reducing Unions Union Connectors

Pattern No.	Tube O.D.
Z-1544	1/4"-1/4"
Z-1564	3/8"-1/4"

Bulkhead Unions

Pattern No.	Tube O.D.
Z-2044	1/4"-1/4"
Z-2066	3/8"-3/8"

Female Connectors

Pattern No.	Tube O.D.	Pipe Thd.
Z-2542	1/4"	1/8"
Z-2544	1/4"	1/4"



Male Elbows w/check valve

Pattern No.	Tube O.D.	Pipe Thd.
Z-4042B	1/4"	1/8"

Male Elbows

Pattern No.	Tube O.D.	Pipe Thd.
Z-4042	1/4"	1/8"
Z-4044	1/4"	1/4"
Z-4046	1/4"	3/8"
Z-4064	3/8"	1/4"
Z-4066	3/8"	3/8"
Z-4088	1/2"	1/2"

Female Elbows

Pattern No.	Tube O.D.	Pipe Thd.
Z-4542	1/4"	1/8"
Z-4544	1/4"	1/4"

Union Elbows

Pattern No.	Tube O.D.
Z-5044	1/4"-1/4"
Z-5066	3/8"-3/8"



Male Branch Tees

Pattern No.	Tube O.D.	Pipe Thd.
Z-6044	1/4"	1/4"
Z-6064	3/8"	1/4"
Z-6066	3/8"	3/8"
Z-6068	3/8"	1/2"

Union Tees

Pattern No.	Tube O.D.
Z-7044	1/4"-1/4"-1/4"
Z-7064	3/8"-1/4"-3/8"
Z-7066	3/8"-3/8"-3/8"

Male Run Tees

Pattern No.	Tube O.D.	Pipe Thd.
Z-7544	1/4"-1/4"	1/4"
Z-7564	3/8"-3/8"	1/4"
Z-7566	3/8"-3/8"	3/8"
Z-7568	3/8"-3/8"	1/2"

Male Reducing Tees

Pattern No.	Tube O.D.	Pipe Thd.
Z-7644	3/8"-1/4"	1/4"
Z-7646	3/8"-1/4"	3/8"



Compression Nuts

Pattern No.	Tube O.D.
Z-0104	1/4"
Z-0308	3/8"
Z-0408	1/2"

3.55" Single Clips

Pattern No.	Tube O.D.
Z-CR03-1L	1/4"

2.5" Single Clips

Pattern No.	Tube O.D.
Z-C0001L	1/4"

2.0" Single Clips

Pattern No.	Tube O.D.
Z-C0001S	1/4"

1.25" Single Clips

Pattern No.	Tube O.D.
Z-CLV-1S	1/4"

2.5"- 2.5" Double Clips

Pattern No.	Tube O.D.
Z-C0002LL	1/4"

2.0"- 2.0" Double Clips

Pattern No.	Tube O.D.
Z-C0002SS	1/4"

2.5"- 2.0" Double Clips

Pattern No.	Tube O.D.
Z-C0002LS	1/4"

3.55"-2.5" Double Clips

Pattern No.	Tube O.D.
Z-CR03-2LS	1/4"

RO ACCESSORIES

配件系列



Pattern No.	Tube O.D.
P304	1/4"



Bushing

Pattern No.	Male Thd.	Female Thd.
BS0604	3/8"	1/4"



Male Pipe NPT-with O-Ring

Pattern No.	Pipe Thd.
Z-PN-1608	1" + 1/2"



Male Pipe NPT-with O-Ring

Pattern No.	Pipe Thd.
Z-PN-1612	1" + 3/4"



Connector

Pattern No.	Male Thd.	Female Thd.
251612B	1"	3/4"
251216B	3/4"	1"
25812	1/2"	3/4"



Bushing

Pattern No.	Male Thd.	Female Thd.
BS1612	1"	3/4"
BS1612BSP	1"	3/4"
BS1208	3/4"	1/2"
BS1608	1"	1/2"



Male Pipe NPT-with O-Ring

Pattern No.	Pipe Thd.
Z-PN-4	1/4"
Z-PN-6	3/8"
Z-PN-8	1/2"
Z-PN-12	3/4"
Z-PN-12BSP	3/4"



Male Pipe NPT-with O-Ring

Pattern No.	Pipe Thd.
Z-PN-16	1"
Z-PN-20	1-1/4"
Z-PN-24	1-1/2"
Z-PN-16BSP	1"
Z-PN-20BSP	1-1/4"
Z-PN-24BSP	1-1/2"



Stem To Hose

Pattern No.	Stem O.D.	Pipe
Z-SH1046	1/4"	3/8"
Z-SH1066	3/8"	3/8"



Stem To Hose

Pattern No.	Stem O.D.	Pipe
Z-SH4044	1/4"	1/4"
Z-SH4066	3/8"	3/8"



Nut for Bulkhead Union

Pattern No.	Pipe Thd.
Z-2044-1	1/4"
Z-2066-1	3/8"



Plug

Pattern No.	Tube O.D.	Color
Z-Q-P0104W	1/4"	White
Z-Q-P0104L	1/4"	Blue
Z-Q-P0104R	1/4"	Red
Z-Q-P0104Y	1/4"	Yellow
Z-Q-P0104B	1/4"	Black
Z-Q-P0308W	3/8"	White



OW3 Wrench for collects. 1/4"



FW-04 (1/4" use)
FW-06 (3/8" use)



Z-TU06395 (3/8" use)

RO ACCESSORIES

配件系列



Tube Insert

Pattern No.	Tube O.D.
TAN-1350CC	1/4"



Tube Insert

White - 150cc	Yellow - 800cc
Blue - 220cc	Orange - 1200cc
Green - 300cc	Red - 1600cc
Natural - 420cc	Purple - 2000cc
Pink - 550cc	



Locking Clip

Pattern No.	Tube O.D.
Z-C-LC0004	1/4"
Z-C-LC0006	3/8"



Collets

Pattern No.	Tube O.D.
Z-C0004	1/4"
Z-C0006	3/8"
Z-C0008	1/2"



Tubing Fixing

Pattern No.	Tube O.D.
CL011	3/8"



Drain Saddle-NPTF

Pattern No.	Thd.
CU-114B	1/4"



Drain Saddle-Quick

Pattern No.	Tube O.D.
CU-114B-Q	1/4"
CU-138B-Q	3/8"



Drain Saddle-Jaco

Pattern No.	Tube O.D.
CU-114B-J	1/4"



Float Switch w/Check valve

Pattern No.
Z-FS001 (Top)



Float Switch w/Check valve

Pattern No.
Z-FS002 (Side)

▲ RO use



Float Switch

Pattern No.
Z-FS003 (Top)



Float Switch w/Check valve

Pattern No.
Z-FS004 (Side)

▲ RO use



Float Switch w/Check valve

Pattern No.
Z-FS005 (Top)

▲ RO use

Gooseneck Hanger



Pattern No.	Tube O.D.
ZZ-0012	1/4" O.D.
ZZ-0013	3/8" O.D.

Filter Cartridge Fixing Ring



ZZB-FR0001

O Type Wrench



ZZB-0001W



ZZ20-0001W



P-15W



RO3-004W

QUICK TWIST DISPOSABLE FILTER

快速安裝 拋棄式濾心系列

QUICK TWIST

快拆式



Quick Twist Disposable Filter

專利快速安裝 拋棄式濾心系列

DP252 RO CAP
1/4" NPT, 1/4" OD

DP252/DP302
Quick CAP: 1/4", 3/8"



DP250/ DP251/ DP300/ DP301
Thd Type

DP252/ DP302/ DP303
Thd Type



Patented In:
U.S.A / Germany / Taiwan / China

DP303 CAP w/Hanger type : 1/4"



DP250

DP251

DP252

DP300

DP301

DP302

DP303

DP303

Specifications 規格表

Model No. 型號	DP250	DP251	DP252	DP300	DP301	DP302	DP303
Inside dimension 內徑	2.5" x 10"	2.5" x 10"	2.5" x 10"	3" x 10"	3" x 10"	3" x 10"	3" x 10"
In / Out port 進出孔徑	1/4" NPT	1/4" NPT	1/4" NPT 1/4", 3/8" Quick	1/4" NPT	1/4" NPT	1/4" NPT 1/4", 3/8" Quick	1/4" NPT 1/4", 3/8" Quick
Filter body material 本體材質	Cap: PP	Cap: POM/ABS	Cap: POM/ABS	Cap: POM/ABS	Cap: POM/ABS	Cap: POM/ABS	Cap: POM/ABS
	Body: PP	Body: PP	Body: PP	Body: PP	Body: PP	Body: PP	Body: PP

Filtration media 內徑

1st stage 第一道	PP Sediment PP雜質濾心
2nd stage 第二道	Granular Activated Carbon 顆粒活性碳濾心
3rd stage 第三道	Carbon Block 活性碳棒濾心/FPC Dual Function Filter 複合碳棒濾心/UF 中空絲膜/MB RO membrane

Operation specification 適用範圍

Capacity 壽命	N/A - depends upon the quality of the influent water
Flow rate 流量	2.5" 0.5 GPM, (1.9 LPM) / 3" 1 GPM, (3.8 LPM)
Max. pressure 最大操作壓力	125 psi
Temperature 溫度	4 ~ 38°C
Uses 用途	Under the counter, Drinking Fountain, R.O. System

Whole House Water Filter Assembly

戶外型 - 水塔淨水器

WHC-BB103G

Whole House Water Filter Assembly

戶外型 - 水塔淨水器

Description:

Materials

Mounting bracket: Coated steel plate

Housing: 10" Big Blue

Inlet / outlet: 3/4", 1", 1-1/4", 1-1/2"

材質

吊片：烤漆鋼板

濾殼：10" 大胖

進出水口：3/4", 1", 1-1/4", 1-1/2"

Description:

Materials

Mounting bracket: Coated steel plate

Housing: 20" Big Blue

Inlet / outlet: 3/4", 1", 1-1/4", 1-1/2"

材質

吊片：烤漆鋼板

濾殼：20" 大胖

進出水口：3/4", 1", 1-1/4", 1-1/2"



Description:

Materials

Mounting stand: Coated steel, welded construction

Housing: 20" Big Blue

Inlet / outlet: 3/4", 1", 1-1/4", 1-1/2"

材質

吊架：烤漆鋼板·焊接結構

濾殼：20" 大胖

進出水口：3/4", 1", 1-1/4", 1-1/2"

**Stainless steel stand available.

REVERSE-OSMOSIS FILTER HOUSING • WATER PURIFICATION FILTER HOUSING
RO逆滲透濾殼 • 一般淨水器濾殼

STANDARD

標準型



STANDARD 標準型

MODEL IDENTIFICATION 型號解釋

EG-14CW

Cap Color 蓋子顏色

Filter Housing Color 濾殼顏色

Standard Model 標準型

EG Type Cap 瓶蓋EG型

STANDARD
MODEL
標準型



YT TYPE (INLET/OUTLET PORT 1/4", 3/8") YT型 (進出水孔 1/4", 3/8")



EG TYPE (INLET/OUTLET PORT 1/4", 3/8", 1/2") EG型 (進出水孔 1/4", 3/8", 1/2")




YT3 TYPE (INLET/OUTLET PORT 1/2", 3/4") YT3型 (進出水孔 1/2", 3/4")



●YT TYPE CAP
YT型瓶蓋



●EG TYPE CAP
EG型瓶蓋



●YT3 TYPE CAP
YT3型瓶蓋



●WITH BRASS THREAD
加銅套

SPECIFICATIONS 規格表

MODEL NUMBER 型號	Filter Housing 濾殼 Length長度	Color顏色	Cap 瓶蓋		Packing 包裝方式
			IN/OUT Port 進出水孔	Color顏色	
YT-14CB	10"	Clear 透明	1/4", 3/8"	Black 黑色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
YT-14BL	10"	Blue 藍色	1/4", 3/8"	Black 黑色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
YT-14CW	10"	Clear 透明	1/4", 3/8"	White 白色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
YT-14WW	10"	White 白色	1/4", 3/8"	White 白色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
EG-14CB	10"	Clear 透明	1/4", 3/8", 1/2"	Black 黑色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
EG-14BL	10"	Blue 藍色	1/4", 3/8", 1/2"	Black 黑色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
EG-14CW	10"	Clear 透明	1/4", 3/8", 1/2"	White 白色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
EG-14WW	10"	White 白色	1/4", 3/8", 1/2"	White 白色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
YT3-10CW	10"	Clear 透明	1/2", 3/4"	White 白色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
YT3-10WW	10"	White 白色	1/2", 3/4"	White 白色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
EG3-10WW	10"	White 白色	1/4", 3/8", 1/2"	White 白色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝



Double O-ring Filter Housing RO System • Water Purification Filter Housing

雙O型環濾殼系列

RO逆滲透濾殼 一般淨水器濾殼



5" RO Filter Housing

RO System • Water Purification Filter Housing

小容量濾殼系列

RO逆滲透濾殼 一般淨水器濾殼



SPECIFICATIONS 規格表

MODEL NUMBER 型號	Filter Housing 濾殼		Cap 瓶蓋		Packing 包裝方式
	Length 長度	Color 顏色	IN/OUT Port 進出水孔	Color 顏色	
EGS2-10CW	10"	Clear 透明	1/4", 3/8"	White 白色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
EGS2-10WW	10"	White 白色	1/4", 3/8"	White 白色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
EGS1-10CB	10"	Clear 透明	1/4", 3/8", 1/2"	Black 黑色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
EGS1-10BL	10"	Blue 藍色	1/4", 3/8", 1/2"	Black 黑色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
EGS1-10CW	10"	Clear 透明	1/4", 3/8", 1/2"	White 白色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
EGS1-10WW	10"	White 白色	1/4", 3/8", 1/2"	White 白色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
EGS1-20CB	20"	Clear 透明	1/4", 3/8", 3/4"	Black 黑色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
EGS1-20BL	20"	Blue 藍色	1/4", 3/8", 3/4"	Black 黑色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
EGS1-20CW	20"	Clear 透明	1/4", 3/8", 3/4"	White 白色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
EGS1-20WW	20"	White 白色	1/4", 3/8", 3/4"	White 白色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
EG-05CB	5"	Clear 透明	1/4", 3/8", 1/2"	Black 黑色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
EG-05BL	5"	Blue 藍色	1/4", 3/8", 1/2"	Black 黑色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
EG-05CW	5"	Clear 透明	1/4", 3/8", 1/2"	White 白色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
EG-05WW	5"	White 白色	1/4", 3/8", 1/2"	White 白色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
YT-05CB	5"	Clear 透明	1/4", 3/8", 1/2"	Black 黑色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
YT-05BL	5"	Blue 藍色	1/4", 3/8"	Black 黑色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
YT-05CW	5"	Clear 透明	1/4", 3/8"	White 白色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝
YT-05WW	5"	White 白色	1/4", 3/8"	White 白色	15 pcs/carton/plastic bag packing 1箱15支/塑膠袋裝

IDEAL FOR SHOP AND COMPANY APPLICATIONS
商店及公司行號專用濾殼

MEDIUM 小胖型




MEDIUM 小胖型

MODEL IDENTIFICATION 型號解釋

YT-10BL-3

INLET/OUTLET PORT 進出水孔
3 = 3/8", 6 = 3/4", 4 = 1/2"
Filter Housing Color 濾殼顏色
Cap Color 蓋子顏色
10 = 10" Filter Housing 濾殼
20 = 20" Filter Housing 濾殼
YT Type Cap 瓶蓋YT型



YT TYPE 10" (INLET/OUTLET PORT 3/8", 1/2", 3/4")
YT型 10" (進出水孔 3/8", 1/2", 3/4")

MEDIUM
TYPE
小胖型



YT TYPE 20" (INLET/OUTLET PORT 3/8", 1/2", 3/4")
YT型 20" (進出水孔 3/8", 1/2", 3/4")



●YT TYPE CAP
YT型瓶蓋



●WITH BRASS THREAD
加銅套

SPECIFICATIONS 規格表

MODEL NUMBER 型號	Filter Housing 濾殼		Cap 瓶蓋		Packing 包裝方式
	Length 長度	Color 顏色	IN/OUT Port 進出水孔	Color 顏色	
YT-10BL-3	10"	Blue 藍色	3/8"	Black 黑色	12 pcs/carton/plastic bag + spacer 1箱12支/塑膠袋+隔板
YT-10BL-4	10"	Blue 藍色	1/2"	Black 黑色	12 pcs/carton/plastic bag + spacer 1箱12支/塑膠袋+隔板
YT-10BL-6	10"	Blue 藍色	3/4"	Black 黑色	12 pcs/carton/plastic bag + spacer 1箱12支/塑膠袋+隔板
YT-10CB-3	10"	Clear 透明	3/8"	Black 黑色	12 pcs/carton/plastic bag + spacer 1箱12支/塑膠袋+隔板
YT-10CB-4	10"	Clear 透明	1/2"	Black 黑色	12 pcs/carton/plastic bag + spacer 1箱12支/塑膠袋+隔板
YT-10CB-6	10"	Clear 透明	3/4"	Black 黑色	12 pcs/carton/plastic bag + spacer 1箱12支/塑膠袋+隔板
YT-10RR-6	10"	Hot-Temp 耐熱	3/4"	Hot-Temp耐熱	12 pcs/carton/plastic bag + spacer 1箱12支/塑膠袋+隔板
YT-20BL-3	20"	Blue 藍色	3/8"	Black 黑色	8 pcs/carton/plastic bag + spacer 1箱8支/塑膠袋+隔板
YT-20BL-4	20"	Blue 藍色	1/2"	Black 黑色	8 pcs/carton/plastic bag + spacer 1箱8支/塑膠袋+隔板
YT-20BL-6	20"	Blue 藍色	3/4"	Black 黑色	8 pcs/carton/plastic bag + spacer 1箱8支/塑膠袋+隔板
YT-20CB-3	20"	Clear 透明	3/8"	Black 黑色	8 pcs/carton/plastic bag + spacer 1箱8支/塑膠袋+隔板
YT-20CB-4	20"	Clear 透明	1/2"	Black 黑色	8 pcs/carton/plastic bag + spacer 1箱8支/塑膠袋+隔板
YT-20CB-6	20"	Clear 透明	3/4"	Black 黑色	8 pcs/carton/plastic bag + spacer 1箱8支/塑膠袋+隔板
YT-20RR-6	20"	Hot-Temp 耐熱	3/4"	Hot-Temp耐熱	8 pcs/carton/plastic bag + spacer 1箱8支/塑膠袋+隔板

GREAT FLOW. IDEAL FOR WATER TREATMENT AND COMMERCIAL APPLICATIONS.
大流量，適合大型水處理，適合商用

BIG BLUE

大胖型



Double O-ring

BIG BLUE
大胖型

MODEL IDENTIFICATION 型號解釋

YTB-10BL-1

INLET/OUTLET PORT SIZE 進出水孔
1=1" 12=1 1/4" 14=1 1/2"

Filter Housing Color 濾殼顏色

Cap Color 蓋子顏色

10=10" Filter Housing 濾殼

20=20" Filter Housing 濾殼

Big Blue 大胖型

Cap Type 瓶蓋型

BIG BLUE
大胖型



B
L

YT TYPE 10" (INLET/OUTLET PORT 3/4", 1", 1-1/4", 1-1/2")

YT型 10" (進出水孔 3/4", 1", 1-1/4", 1-1/2")



B
L

YT TYPE 20" (INLET/OUTLET PORT 3/4", 1", 1-1/4", 1-1/2")

YT型 20" (進出水孔 3/4", 1", 1-1/4", 1-1/2")



●WITH BRASS THREAD
加銅套



●YTB2 Type Cap



●YTB5 Type Cap
Double O-ring Cap



●O TYPE WRENCH
O型板手



●SINGLE HOUSING
HANGER
單管吊片



●DOUBLE HOUSING
HANGER
雙管吊片



●FILTER CARTRIDGE
FIXING RING
濾心固定環



●NIPPLE
螺紋接套

SPECIFICATIONS 規格表

MODEL NUMBER 型號	Filter Housing 濾殼		Cap 瓶蓋		Packing 包裝方式
	Length長度	Color顏色	IN/OUT Port 進出水孔	Color顏色	
YTB-10BL-1	10"	Blue 藍色	1"	Black 黑色	6 pcs/carton/plastic bag + spacer 1箱6支/塑膠袋+隔板
YTB-10BL-12	10"	Blue 藍色	1 1/4"	Black 黑色	6 pcs/carton/plastic bag + spacer 1箱6支/塑膠袋+隔板
YTB-10BL-14	10"	Blue 藍色	1 1/2"	Black 黑色	6 pcs/carton/plastic bag + spacer 1箱6支/塑膠袋+隔板
YTB-10CB-1	10"	Clear 透明	1"	Black 黑色	6 pcs/carton/plastic bag + spacer 1箱6支/塑膠袋+隔板
YTB-10RB-1	10"	Hot-Temp 耐熱	1"	Hot-Temp耐熱	6 pcs/carton/plastic bag + spacer 1箱6支/塑膠袋+隔板
YTB-20BL-1	20"	Blue 藍色	1"	Black 黑色	6 pcs/carton/plastic bag + spacer 1箱6支/塑膠袋+隔板
YTB-20BL-12	20"	Blue 藍色	1 1/4"	Black 黑色	6 pcs/carton/plastic bag + spacer 1箱6支/塑膠袋+隔板
YTB-20BL-14	20"	Blue 藍色	1 1/2"	Black 黑色	6 pcs/carton/plastic bag + spacer 1箱6支/塑膠袋+隔板
YTB-20CB-1	20"	Clear 透明	1"	Black 黑色	6 pcs/carton/plastic bag + spacer 1箱6支/塑膠袋+隔板
YTB-20RB-1	20"	Hot-Temp 耐熱	1"	Hot-Temp耐熱	6 pcs/carton/plastic bag + spacer 1箱6支/塑膠袋+隔板

DIAPHRAGM PUMP

隔膜泵



CP-050
CP-100
CP-400
CP-600

Features & Benefits

- Working Temp : 4°C ~ 42°C
- Prime : Self-Priming up to 2 meter
- Runs dry without damage
- 自動引水可達2M。
- 隔膜泵耐無水空轉不會壞。
- 泵頭有安全洩壓保護彈簧結構，保護壓力 $\leq 120\text{psi}$ 。
- 泵可搭配崧泉高、低壓力開關使用。



Specifications


Model No.	CP-050	CP-100	CP-400	CP-600
Voltage	24	24	24	36
Rated Power	29	36	96	144
Weight (kg)	1.7	1.9	2.3	2.3
Max working pressure	120psi	120psi	120psi	120psi
Max inlet pressure	60psi	60psi	60psi	60psi
Applicable Standard for RO Membrane	50~75GPD	100GPD	400GPD	600GPD
Applicable Standard for system	For residential RO system 50~75GPD	For RO 100GPD	For RO direct flow 400GPD system	For RO direct flow 600GPD system
Transformer application	24VDC/1.2A	24VDC/1.5A	24VDC/4A	36VDC/4A

- CE applications in progress CE 認證申請中

RO ACCESSORIES

配件系列

Brackets 吊片

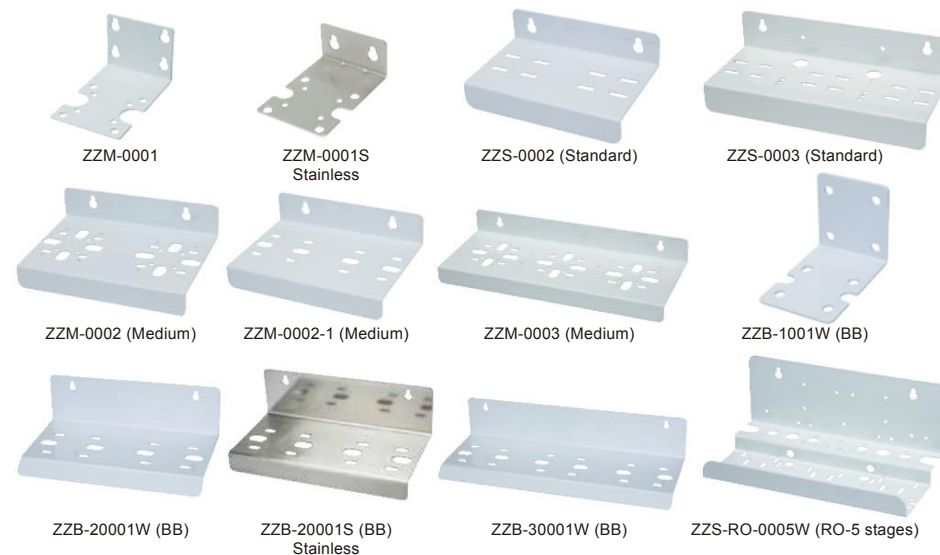

Faucet 鵝頸

